


# Złącza Stopniowe Wymiary

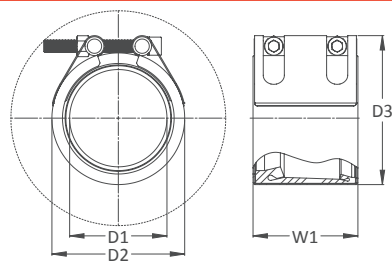

DZ Rury (mniejsza rura) (mm)	Dostępne Szerokości Złączy:				Maksymalny Uskok	Maksymalne Ciśnienie robocze	Liczba Śrub	Rozmiar Śruby	Waga
	85mm	110mm	140mm	210mm	(mm)	PN			KG
48.3 - 56	●				+5	16	2	M8	1
57 - 72	●				+5	16	2	M8	1
73 - 82.5	●				+5	16	2	M8	1
83 - 99		●			+12	16	2	M10	2
100 - 102		●			+15	16	2	M10	2
100 - 127		●			+15	16	2	M10	2
128 - 150		●			+15	16	2	M10	2.5
151 - 186		●	●		+15 / +20	16/16	2 / 2	M10 / 16	2.5 / 4
187 - 205		●	●		+15 / +20	16/16	2 / 2	M10 / 16	2.5 / 4
200 - 240		●	●		+15 / +25	16/16	2 / 2	M10 / 16	3 / 4.5
241 - 260		●	●	●	+15 / +25 / +25	16/16/16	2 / 2 / 3	M10 / 16 / 16	3.5 / 5 / 8
250 - 286		●	●	●	+15 / +25 / +25	16/16/16	2 / 2 / 3	M10 / 16 / 16	3.5 / 5 / 8.5
287 - 326		●			+15	10	2	M10	4
287 - 349			●	●	+25 / +25	16/16	2 / 3	M16 / 16	6 / 10
350 - 399			●	●	+25 / +25	16/16	2 / 3	M16 / 16	7 / 11
400 - 453			●	●	+25 / +25	16/16	2 / 3	M16 / 16	8 / 13
450 - 507			●	●	+25 / +25	10/16/10/16	2 / 3	M16 / 16	9 / 14
500 - 560			●	●	+25 / +25	10/16/10/16	2 / 3	M16 / 16	9.5 / 16
561 - 667			●	●	+25 / +25	10/16/10/16	2 / 3	M16 / 16	11 / 17.5
668 - 750			●	●	+25 / +25	10/10/16	2 / 3	M16 / 16	12.5 / 22.5
751 - 850			●	●	+25 / +25	10/10/16	2 / 3	M16 / 16	14 / 25
851 - 950			●	●	+25 / +25	10/10/16	2 / 3	M16 / 16	16 / 28
951 - 1050			●	●	+25 / +25	6/6	2 / 3	M16 / 16	17 / 30
1051 - 1150			●	●	+25 / +25	6/6	2 / 3	M16 / 16	18 / 38
1151 - 1250			●	●	+25 / +25	2.5/6/2.5/6	2 / 3	M16 / 16	20 / 41
1251 - 1350				●	+25	2.5/6	6	M16	48
1351 - 1450				●	+25	2.5/6	6	M16	50.5
1451 - 1550				●	+25	2.5/6	6	M16	53
1551 - 1650				●	+25	2.5/6	6	M16	56.5
1651 - 1750				●	+25	2.5/5	6	M16	60
1751 - 1850				●	+25	2.5/5	6	M16	62.5
1851 - 1950				●	+25	2.5/5	6	M16	65
1951 - 2050				●	+25	2.5/5	6	M16	68
2051 - 2150				●	+25	2.5 / 4	6	M16	71
2151 - 2250				●	+25	2.5 / 4	12	M16	74
2251 - 2350				●	+25	2.5 / 4	12	M16	76
2351 - 2450				●	+25	2.5 / 4	12	M16	80
2451 - 2550				●	+25	2.5 / 3	12	M16	87.5
2551 - 2650				●	+25	2.5 / 3	12	M16	93
2651 - 2750				●	+25	2.5 / 3	12	M16	96
2751 - 2850				●	+25	2.5 / 3	12	M16	99
2851 - 2950				●	+25	2 / 3	12	M16	110
2951 - 3050				●	+25	2 / 3	12	M16	121

**UWAGI:** Minimalne ciśnienie testowe stanowi 1,5-krotność ciśnienia nominalnego.

Złącza Stopniowe Teekay są złączami nie przenoszącymi sił osiowych

E&OE 01/12/10